Specifications

• Voltage rating	DC 5V
• Current rating	1mA
• Maximum Operating Current	2.5mA
• Chattering	10ms Max.
• Contact resistance	10Ω Max.

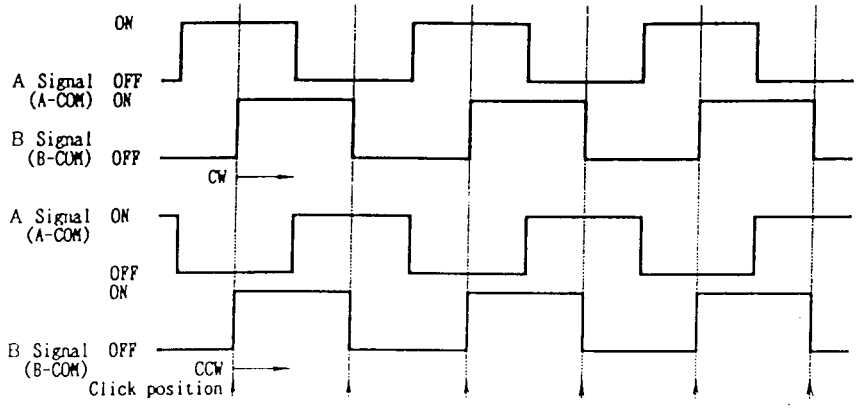

• Resolution	10 Pulses
• Click point A—COM : ON or OFF B—COM : Non provitions	20 Detents
• Phase difference	Td=T/4 ±T/6

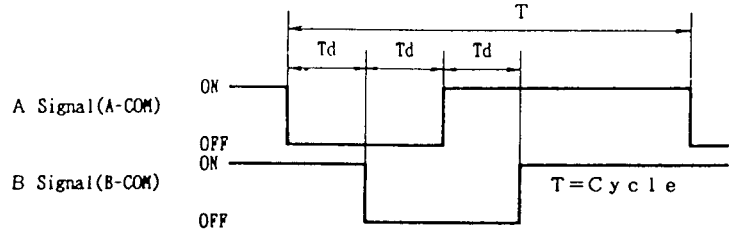

• Duty Ratio	50%±15% (18°±5.4°)
• Change-Over angle	18°±3°
• Rotational Life	50,000 cycles
• Rotational torque	2 to 24.5mN·m 0 to +70°C (20 to 250gf·cm) 49.1mN·m Max. 0 to −20°C (500gf·cm Max.)

• Please refer to TP7 Series for other specification Items